



Wall Top Plate / Min Thickness	Allowable U lbs (kN) ^A			Allowable P1 lbs (kN) ^A							
	TSC2.75	TSC3.00 or TSC4.00	Any Chord Size	28TSC		33TSC		43TSC		54, 68, 97TSC	
	Clip on One Face ^B	Clip on One Face ^B	Clip on Both Faces	Clip on One Face	Clip on Both Faces	Clip on One Face	Clip on Both Faces	Clip on One Face	Clip on Both Faces	Clip on One Face	Clip on Both Faces
20g (33 mils) Grade 33	280 (1.25)	280 (1.25)	660 (2.94)	610 (2.71)	1220 (5.43)	610 (2.71)	1220 (5.43)	610 (2.71)	1220 (5.43)	610 (2.71)	1220 (5.43)
20g (33 mils) Grade 50	400 (1.78)	400 (1.78)	960 (4.27)	710 (3.16)	1410 (6.27)	880 (3.91)	1760 (7.83)	880 (3.91)	1760 (7.83)	880 (3.91)	1760 (7.83)
18g (43 mils) Grade 33	360 (1.60)	360 (1.60)	860 (3.83)					910 (4.05)	1810 (8.05)	910 (4.05)	1810 (8.05)
18g (43 mils) Grade 50	400 (1.78)	520 (2.31)	1250 (5.56)					1310 (5.83)	2610 (11.61)	1310 (5.83)	2610 (11.61)
16g (54 mils) Grade 33		450 (2.00)	1080 (4.80)					1270 (5.65)	2540 (11.30)	1270 (5.65)	2540 (11.30)
16g (54 mils) Grade 50		660 (2.94)	1410 (6.27) ^D					1310 (5.83)	2610 (11.61)	1720 (7.65)	3440 (15.30)
14g (68 mils) Grade 33	570 (2.54)	1360 (6.05)									
14g (68 mils) Grade 50	400 (1.78) ^C	710 (3.16)	1410 (6.27) ^E								
12g (97 mils) Grade 33											
12g (97 mils) Grade 50											

- A. Allowable loads shown on this detail are not in combination.
 B. Uplift connections with clip on one face require a web above connection. For values in chart, TSC2.75 minimum web is 33W.75x.75 and any web size is acceptable for TSC3.00 or TSC4.00.
 C. If web above connection is 33W.75x1.5, U = 710 lbs (3.16 kN).
 D. For 33TSC and greater, U = 1560 lbs (6.94 kN).
 E. For 33TSC, U = 1760 lbs (7.83 kN). For 43TSC and greater, U = 1950 lbs (8.67 kN).

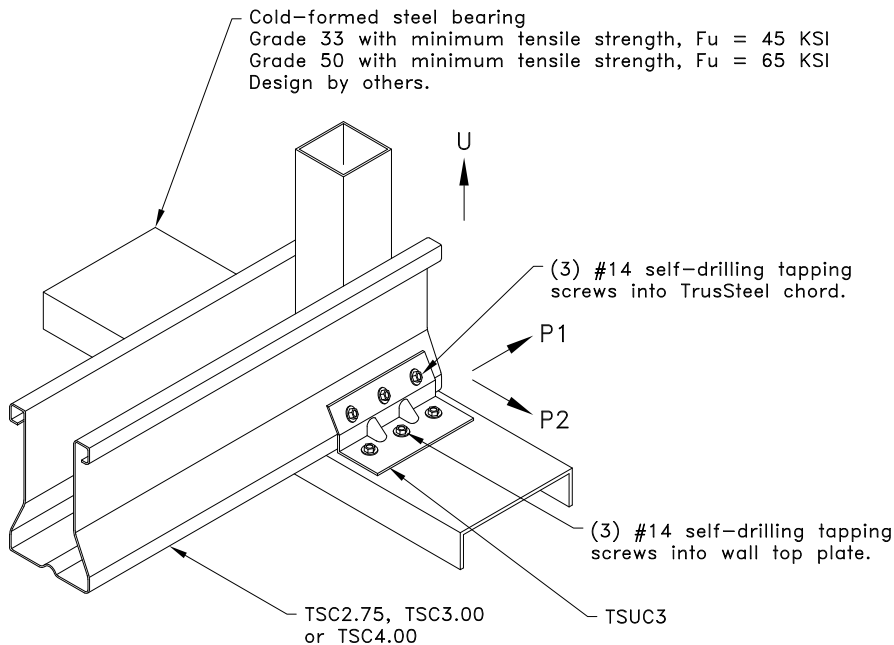

Allowable P2 lbs (kN) ^A		
Chord	Clip on One Face	Clip on Both Faces
28TSC	340 (1.51)	830 (3.69)
≥ 33TSC	340 (1.51)	880 (3.91)

General Notes:

- The wall top plate is to be designed by the job engineer. The wall top plate and connection of top plate to wall stud must be designed to support the loads applied to it (downward, upward and lateral).
- If a clip is required on both faces, attach the second clip to the opposite face of the chord as detailed.
- Multi-ply trusses require a clip on each face. Refer to TrusSteel detail drawing TS023A for ply-to-ply connections for 3-Ply trusses with a clip on each face.
- Cold-Formed Steel calculations are per the 2020 supplement to AISI 2016 "North American Specification for the Design of Cold-Formed Steel Structural Members" (S100-16/S2-20).



www.TrusSteel.com

155 Harlem Ave., North Building, 4th Floor / Glenview, IL 60025 / (800) 755-6001

TSUC3 Uplift Attachment To Cold-Formed Steel Using #14SDS

Alpine, a division of ITW Building Components Group, Inc. shall not be responsible for any performance failure in a connection due to a deviation from this detail. Any variation from this detail shall be approved in advance by Alpine, a division of ITW Building Components Group, Inc.

Standard Detail:

TS028A

Date:

06/01/22

TrusSteel Detail Category:

Truss-To-Bearing: Cold-Formed Steel