


Typical Supported Truss to Girder Connection

	TTC Clip Sizes and Information					
"A" Clips connect the supported truss to the girder truss.						
70075 70700 700400						
	TSC2.75	TSC3.00 or TSC4.00				
	A = TTC5	A = TTC7				

Allowable Values							
H _{min} in	(mm) ^A	H _{max}	Number of "A" Clips				
TSC2.75	TSC3.00 TSC4.00	in (mm) ^A		$R = U$ lbs $(kN)^A$			
9-1/2 (241)	12 (305)	48 (1219)	1	1730 (7.70)			
19 (483)	24 (610)	no max limit	2	2470 (10.99)			

A. R = Allowable Reaction, U = Allowable Uplift and <math>H = Heel height of supported truss.

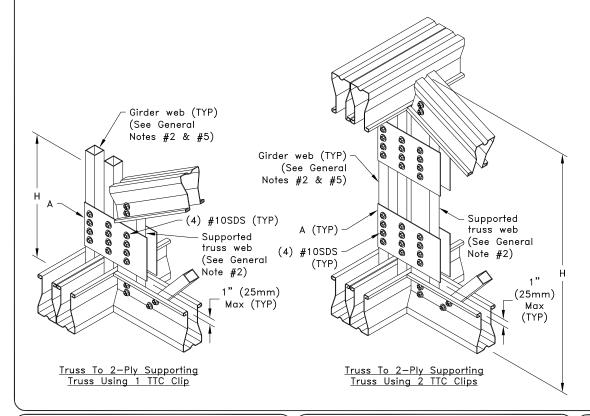

General Notes:

- 1. The top and bottom chords of all trusses shall be properly connected to structural sheathing or purlins, designed by others.
- If supported truss or girder web is a Z-web, refer to TS068 for connection areas.
- 3. SDS = Self-Drilling Tapping Screw. Screw spacing, edge distance and end distance is 9/16" (14mm) minimum.
- 4. The supported truss must be designed utilizing a clip bearing type. For 2 clip connections, place clips within 1" (25mm) of top and bottom chords as shown. For 1 clip connections, place clip within 1" (25mm) of bottom chord or as analyzed.
- 5. This detail is to be used when girder web and supported web are the same width. Girder web shall not be a C-Web.
- 6. Cold—Formed Steel calculations are per the 2020 supplement to AISI 2016 "North American Specification for the Design of Cold—Formed Steel Structural Members" (S100—16/S2—20).

ALPINE TrusSteel

www.TrusSteel.com

155 Harlem Ave., North Building, 4th Floor / Glenview, IL 60025 / (800) 755-6001

Truss-To-Truss Connection

Using TTC Clips (2 Ply Girder)

Alpine, a division of ITW Building Components Group, Inc. shall not be responsible for any performance failure in a connection due to a deviation from this detail. Any variation from this detail shall be approved in advance by Alpine, a division of ITW Building Components Group, Inc.

Standard Detail: TS001B

Date:

06/01/22

TrusSteel Detail Category:

Truss-To-Truss Connections