


Girder Connection

Allowable Values						
Supported Truss Chord Size	H _{min} in (mm) ^A	H _{max} in (mm) ^A	Number of "A" Clips	Clip "A" Size		
				Girder web is tube web	Girder web is Z-web	R = U lbs (kN) ^A
TSC2.75	9-1/2 (241)	48 (1219)	1	TTC5	NA	860 (3.83)
TSC3.00 or TSC4.00	12 (305)	48 (1219)	1	TTC7	TTC7	860 (3.83)
TSC2.75	19 (483)	no max limit	2	TTC5	NA	1720 (7.65)
TSC3.00 or TSC4.00	24 (610)	no max limit	2	TTC7	TTC7	1720 (7.65)

A. R = Allowable Reaction, U = Allowable Uplift and H = Heel height of supported truss.

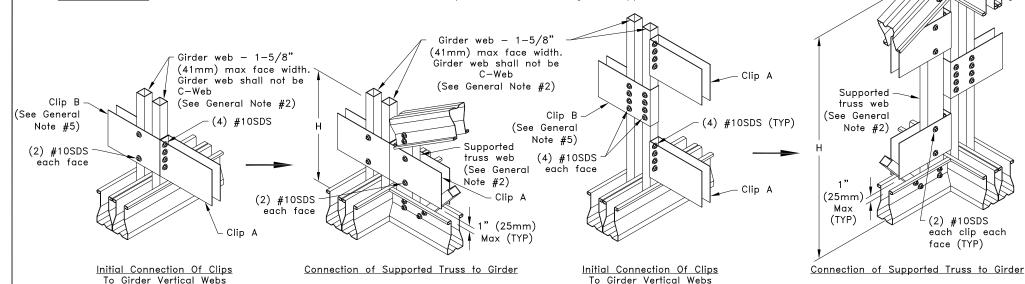

SINGLE CLIP TRUSS TO TRUSS CONNECTION

Girder web -1-5/8" (41mm) max face width. (2) #10SDS Girder web shall not (4) #10SDS each face (TYP) be C-Web (See General Note #2) Clip A Clip B Supported truss web. If (See General supported truss is a Note #5) (2) #10SDS C-Web, open end must Section View each face (TYP) be oriented away from connection as shown.

DOUBLE CLIP TRUSS TO TRUSS CONNECTION

General Notes:

- 1. The top and bottom chords of all trusses shall be properly connected to structural sheathing or purlins, designed by others.
- 2. If supported truss or girder web is a Z-web, refer to TS068 for connection areas.
- 3. SDS = Self-Drilling Tapping screw. Screw spacing, edge distance and end distance is 9/16" (14mm) minimum.
- 4. The supported truss must be designed utilizing a clip bearing type. For 2 clip connections, place within 1" (25mm) of top and bottom chords as shown. For 1 clip connections, place within 1" (25mm) of bottom chord, or as analyzed.
- 5. Clip "B" is TTC5 when girder web is W.75x.75 and TTC7 when girder web is W.75x1.5, W1.5x1.5 or Z1.5x1.62. (If girder web is Z1.5x1.62, bend TTC7 to fit.)
- 6. Cold—Formed Steel calculations are per the 2020 supplement to AISI 2016 "North American Specification for the Design of Cold-Formed Steel Structural Members" (\$100-16/\$2-20).



Face Mounted Truss To Truss Connection

Using TTC Clips (2 Ply Girder)

Alpine, a division of ITW Building Components Group, Inc. shall not be responsible for any performance failure in a connection due to a deviation from this detail. Any variation from this detail shall be approved in advance by Alpine, a division of ITW Building Components Group, Inc.

Standard Detail: TS001E Date: 06/01/22

TrusSteel Detail Category:

Truss-To-Truss Connections

www.TrusSteel.com

155 Harlem Ave., North Building, 4th Floor / Glenview, IL 60025 / (800) 755-6001