


Fasteners Through The Web Area Centered Seat Cut Tube and Fastener Placement Tube Size: 33W1.5x1.5x6"(152mm)

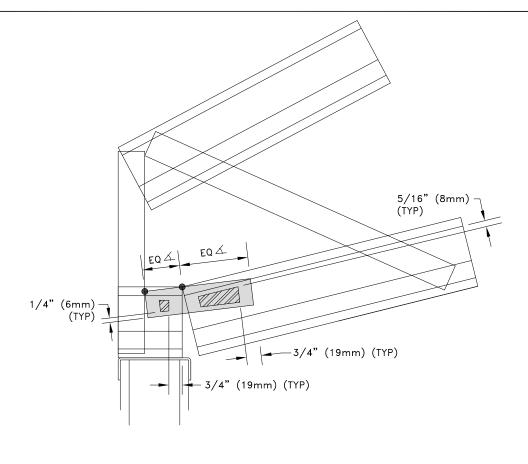

<u>Fasteners Through The Web Area</u> Off-Center Seat Cut Tube and Fastener Placement Tube Size: 33W1.5x1.5x6"(152mm)

General Notes:

- 1. Refer to approved truss drawings for required fastener type and quantities for each fastener contact area.
- 2. Fastener spacing is 1-1/4" (32mm) and end distance is 3/4" (19mm) minimum, except as shown.
- = Fastener contact area.
- = Contact point between Seat Cut Tube and Chord/Web.
- \angle = Angle between top of bottom chord and top of Seat Cut Tube.



www.TrusSteel.com

Connector Alpine, a division of ITW Building Components Group, Inc. shall not be responsible for any performance failure in a connection due to a deviation from this detail. Any variation from this detail shall be approved in advance by Alpine, a division of

ITW Building Components Group, Inc.

TSC3.00 or TSC4.00

Seat Cut Tube Pitch Break

Standard Detail:

TS016F

Date:

06/01/22

TrusSteel Detail Category:

Pitch Break Connections

155 Harlem Ave., North Building, 4th Floor / Glenview, IL 60025 / (800) 755-6001