


IMPERIAL Z-WEB VALUES

SECTION NAME	GAUGE	DESIGN THICKNESS (in)	F _y (ksi)	F _u (ksi)	FULL SECTION PROPERTIES					FULLY BRACED ALLOWABLES			
					A _g (in ²)	I _x (in ⁴)	S _x (in ³)	I _y (in ⁴)	S _y (in ³)	T _a (lbs.)	P _a (lbs.)	M _{ax} (in-lbs.)	Wt (lbs./ft.)
33Z1.5X1.62	20	0.0346	40	55	0.2496	0.0851	0.1047	0.0731	0.0974	5,979	5,397	2,474	0.849
43Z1.5X1.62	18	0.0451	40	55	0.3218	0.1087	0.1338	0.0926	0.1235	7,707	7,150	3,204	1.094
33Z1.5X2.50	20	0.0346	40	55	0.3070	0.2333	0.1867	0.1030	0.1374	7,353	6,759	4,416	1.044
43Z1.5X2.50	18	0.0451	40	55	0.3966	0.2998	0.2398	0.1311	0.1748	9,499	8,813	5,744	1.348
43Z1.5X3.62	18	0.0451	40	55	0.4980	0.7437	0.4103	0.1848	0.2464	11,929	10,611	9,796	1.693
54Z1.5X3.62	16	0.0566	50	65	0.6163	0.9157	0.5052	0.2242	0.2990	18,452	16,554	15,078	2.095

METRIC Z-WEB VALUES

SECTION NAME	GAUGE	DESIGN THICKNESS (mm)	F _y (MPa)	F _u (MPa)	FULL SECTION PROPERTIES					FULLY BRACED ALLOWABLES			
					A _g (mm ²)	I _x (mm ⁴)	S _x (mm ³)	I _y (mm ⁴)	S _y (mm ³)	T _a (kN)	P _a (kN)	M _{ax} (kN-mm)	Wt (kN/m)
33Z1.5X1.62	20	0.8788	276	379	161	35,421	1,716	30,427	1,596	26.60	24.01	279.5	0.012
43Z1.5X1.62	18	1.1455	276	379	208	45,244	2,193	38,543	2,024	34.28	31.80	362.0	0.160
33Z1.5X2.50	20	0.8788	276	379	198	97,107	3,059	42,872	2,252	32.71	30.07	499.0	0.152
43Z1.5X2.50	18	1.1455	276	379	256	124,786	3,930	54,568	2,864	42.25	39.20	649.0	0.197
43Z1.5X3.62	18	1.1455	276	379	321	309,551	6,724	76,920	4,038	53.06	47.20	1,107.0	0.247
54Z1.5X3.62	16	1.4376	345	448	398	381,143	8,279	93,319	4,900	82.08	73.64	1,703.6	0.306

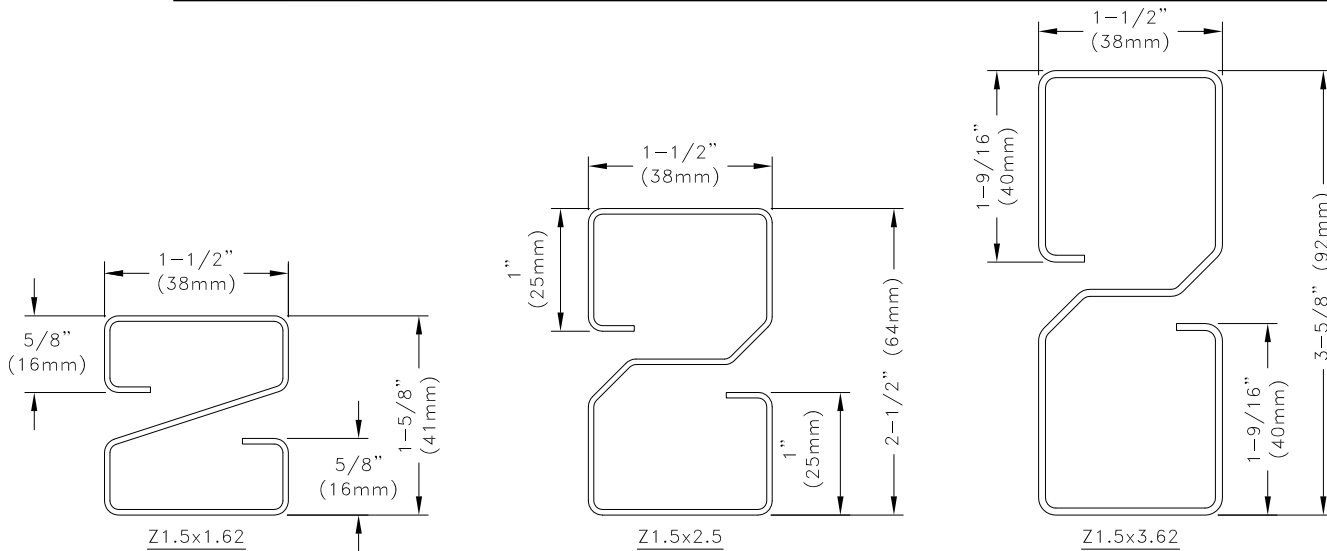

General Notes:

1. All steel is ASTM A653 steel with G60 minimum galvanization. Bare metal thickness is 95% of design thickness.
2. Properties determined according to the 2010 supplement to the AISI 2007 "North American Specifications for the Design of Cold-Formed Steel Structural Members" (S100-07/S2-10).
3. T_a = Allowable Tension, P_a = Allowable Compression, M_{ax} = Allowable Moment, Wt = Weight
4. The allowable values given in this table do not reflect any strength increase due to cold work of forming.

TrusSteel[®]

www.TrusSteel.com

Florida: 1950 Marley Drive / Haines City, FL 33844 / (800) 755-6001
 Missouri: 13389 Lakefront Drive / Earth City, MO 63045 / (800) 326-4102

TSC3.00 & TSC4.00
Z-Web Properties

ITW Building Components Group, Inc. shall not be responsible for any performance failure in a connection due to a deviation from this detail. Any variation from this detail shall be approved in advance by ITW Building Components Group, Inc.

Standard Detail:

TS010A

Date:

07/16/12

TrusSteel Detail Category:

Member Section Properties